

# Mini-TC built-in coupling type K for panels gn


**Article no.:** 809120 2000

Mini-TC built-in coupling type K for panels gn is made of Glass fiber filled plastic. Perm. range °C up to max. 220 °C. Suitable for Type K, NiCr-Ni (green according to DIN EN 60584) .



Technical details	
Suitable for	Type K, NiCr-Ni (green according to DIN EN 60584)
Perm. range °C	max. 220 °C
Housing	Glass fiber filled plastic
Conductor diameter	Clamps up to 0,6 mm Ø, fast connection by means of shear clamps
Reverse polarity protection	due to different contact pin widths, polarity markings next to the terminal screws
Panel cutout (mm)	8,1 x 16,1
Board thickness (mm)	2,5
Bushing	spring loaded, orginial thermocouple materials
Length (mm)	18
Width (mm)	9
Height (mm)	19
Scope of delivery	Mini-TC built-in coupling type K for panels gn, packed in PE bag

## Technical drawing

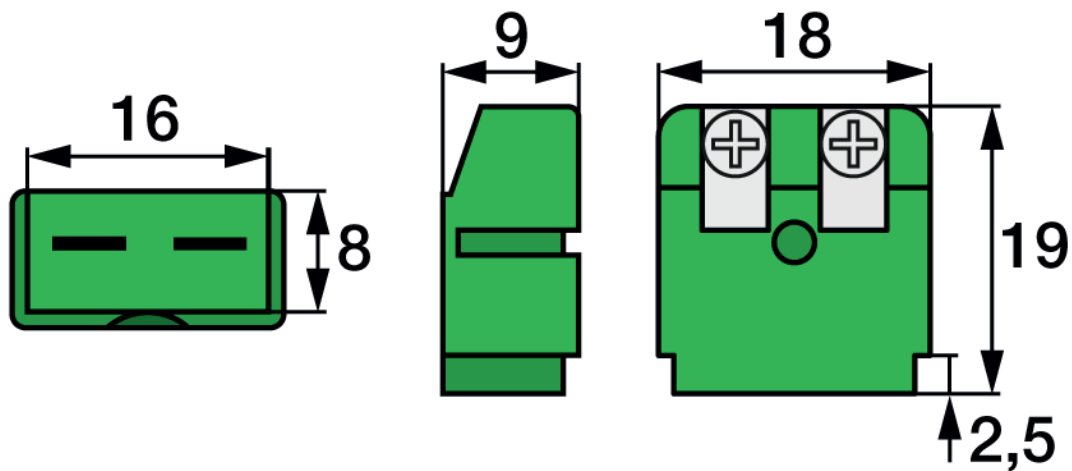

## Testo Sensor GmbH