# Brass immersion sleeve R1/2 "

## with pressure screw THE-MS

**Article no. 809521 40XX**

This immersion sleeve, made of robust brass, is ideal for use in heating and plumbing applications. The integrated setscrew ensures a secure and quick fixation of the temperature probe. Available in various installation lengths, it offers maximum flexibility for different mounting requirements.

| General Information | |
|---|---|
| Temp. Max | +130 °C |
| Pressure proof up to | 16 bar (static) |
| Material | Nickel plated |
| Process connection | R 1/2 " |
| Wrench size | 22 |
| Diameter outside (mm) | 9 |
| Diameter inner (mm) | 5,2 |
| Scope of delivery | Brass immersion sleeve R1/2 " with pressure screw THE-MS |

| Order code | | | |
|---|---|---|---|
| **Article no.** | | **Code** | **ML (mm)** |
| 809521 40 | _ _ | 05 | 50 |
| | | 10 | 100 |
| | | 15 | 150 |
| | | 20 | 200 |
| | | 25 | 250 |
| Please attach the code for the mounting length. | | | |



**Customizable options**
Mounting length

**Technical drawing**

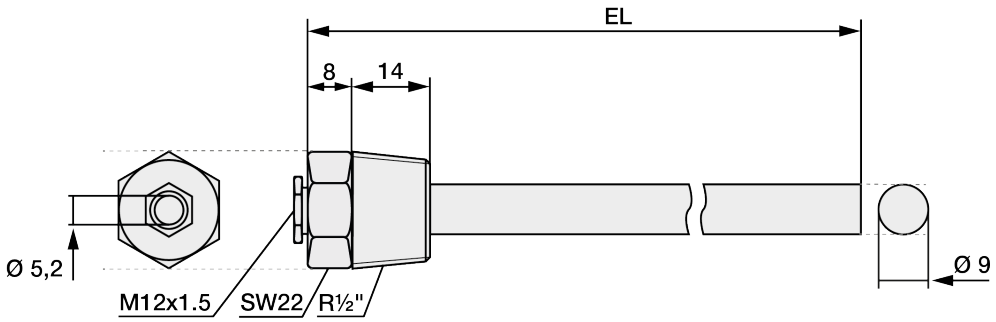


All dimensions in mm

MW / KC / 23.10.2025

**Testo Sensor GmbH**
Testo-Straße 1
D-79853 Lenzkirch
+49 7653 96597-71
webshop@testo-sensor.de
Managing Directors: Timo Löffler, Peter Kräuter
Amtsgericht Freiburg HRB 706025 | VAT-ID: DE274417683 | Business-ID: DE274417683-00001