



Matching accessoires: Immersion sleeves

Brass immersion sleeve R1/2 " TH-MS				
Article no.	809520 70XX	Code	ML (mm)	
Temp. max	+150 °C	05	50	
Pressure proof up to	10 bar	10	100	
Material	Nickel plated	15	150	
Process connection	R1/2 "	20	200	
Wrench size	22	25	250	
Ø Inside / Outside (mm)	6,5 / 8	30	300	
Scope of delivery	Brass immersion sleeve R1/2 " TH-MS	40	400	
Order code	809520 70	--		

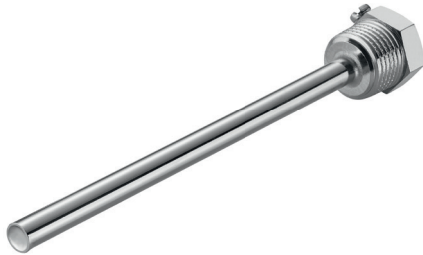


Please attach the code for the mounting length.

Technical drawing

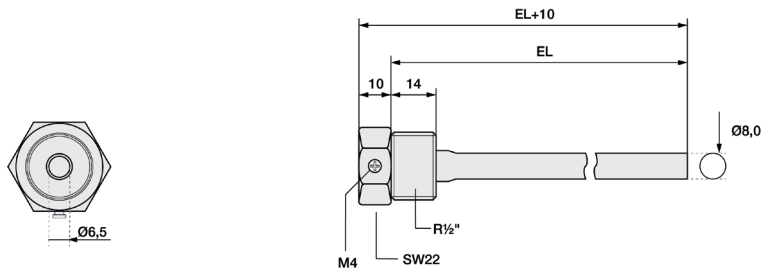


Stainless steel immersion sleeve G1/2 " TH-VA				
Article no.	809520 80XX	Code	ML (mm)	
Temp. max	+600 °C	05	50	
Pressure proof up to	40 bar	10	100	
Material	1.4571 (316Ti)	15	150	
Process connection	G1/2 "	20	200	
Wrench size	27	25	250	
Ø Inside / Outside (mm)	6,5 / 8	30	300	
Scope of delivery	Stainless steel immersion sleeve G1/2 " TH-VA	40	400	
Your order code	809520 80	--		

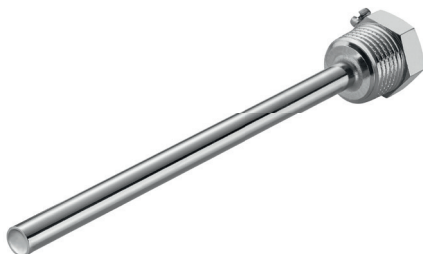

Please attach the code for the mounting length.

Technical drawing

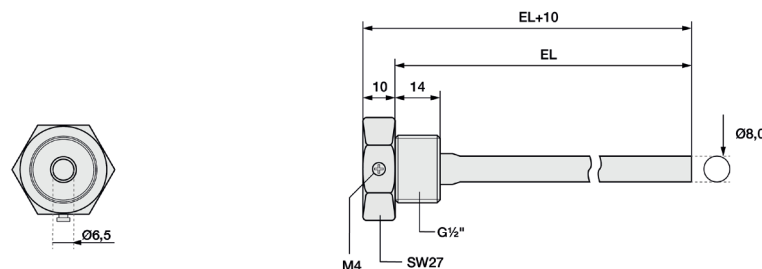

MW / KS / 05.06.2023

Testo Sensor GmbH

Testo-Straße 1
D-79853 Lenzkirch

+49 7653 96597-0
+49 7653 96597-99

info@testo-sensor.de
www.testo-sensor.de


You can find our standard portfolio in our
webshop at: www.testo-sensor.shop

Stainless steel immersion sleeve G1/2 " with neck tube TH-VA

Article no.	809520 90XX	Code	EL (mm)
Temp. max	+600 °C	05	50
Pressure proof up to	40 bar	10	100
Material	1.4571 (316Ti)	15	150
Process connection	G1/2 "	20	200
Wrench size	27	25	250
Ø Inside / Outside (mm)	6,5 / 8	30	300
Length neck tube (mm)	90		
Scope of delivery	Stainless steel immersion sleeve G1/2 " with neck tube TH-VA		
Your order code	809520 80	--	

Please attach the code for the mounting length.

Technical drawing

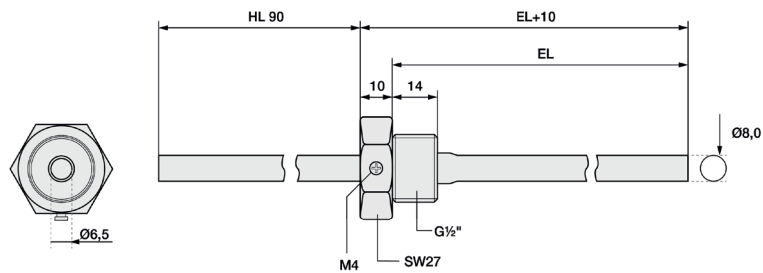

MW / KS / 05.06.2023

Testo Sensor GmbH

Testo-Straße 1
D-79853 Lenzkirch

+49 7653 96597-0
+49 7653 96597-99

info@testo-sensor.de
www.testo-sensor.de

You can find our standard portfolio in our
webshop at: www.testo-sensor.shop