

Pressure transmitter high 0-10 V with display

Article number: 801514 2033

The pressure transmitter high 0-10 V with display is suitable for precise measurement and direct display of pressure differences in gaseous and liquid media. The rotatable and tiltable display module allows flexible alignment and clearly shows measured values and device settings. Typical areas of application include building automation, mechanical engineering, and the monitoring of ventilation and filter systems. The compact housing with G 1/8" process connections offers protection class IP65. Installation is carried out using the supplied bracket, and the mounting position can be freely selected.




Supply and output	
Output	0 - 10 V (3-Wire)
Load	RI > 10 kOhm
Insulation resistance	≥ 100 Mohm, at +20 °C (500 V DC)
Voltage supply	24 V AC (+ 15 % / - 10 %) 18 - 33 V DC

Pressure	
Pressure type	Differential pressure
Measuring principle	Ceramic measuring cell (no separate pressure transmitter required)
Pressure range	See table
Accuracy pressure	Total error < 1.3%
Response time	< 5 ms
Class	0,5 %
Total error	< 1,3 %
System pressure	max. 25bar (P1+P2)
Burst pressure	1.5 x system pressure
Overload	dependent on pressure range

Body	
Material	Stainless steel 1.4305 SUS 303
Color	Black, red
Dimensions (L/W/H) (mm)	224 x 128 x 43,3
Wetted parts	INOX (1.4305), ceramic, EPDM seal
Pressure connection	Pipe fitting for 6 mm pipe (G 1/8" - 27 NPT internal thread)
Electrical connection	0.25 - 1.5 mm ² , via plug connector DIN EN 175301-803-A (included in the scope of delivery)
Process connection	using mounting bracket

Display module	
Material	Plastic, UV-resistant, Material: PC/ABS, 30% glass bead reinforced
Color	Black (similar to RAL9004)
Dimensions (L/W/H) (mm)	72 x 67 x 43,3
Closure	with quick-release screws

Configurable options
P-Pressure range

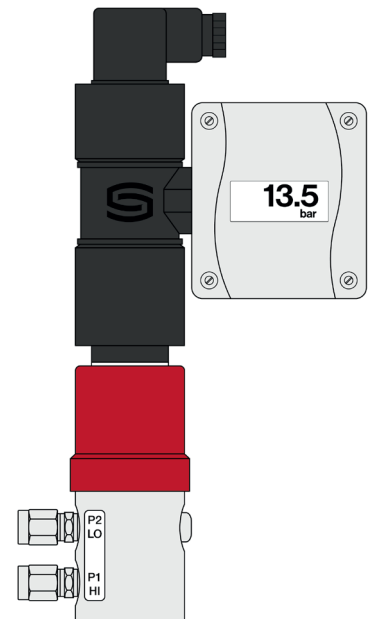

MW / KC 22.07.2025

Testo Sensor GmbH

+49 7653 96597-71

Managing Director: Peter Kräuter, Timo Löffler

Testo-Straße 1
D-79853 Lenzkirch

✉ webshop@testo-sensor.de

Amtsgericht Freiburg HRB 706025 | Umsatzsteuer-ID.: DE274417683

🌐 Please find our whole temperature probe and transmitter portfolio in our webshop at: www.testo-sensor.shop

Display	
Cut-out (B/H) (mm)	ca. 36 x 15
Display content	Pressure [bar] [kPa] [psi] [inWC] [mWC] [atm], voltage [V] or current [mA]
System of units	SI and Imperial (display configurable)
Display module can be rotated and tilted, For displaying the actual pressure, min/max pressure or standard signal of the sensor	

Ambient conditions	
Storage temperature	-40 °C to +85 °C
Operating temperature	-10 °C to +80 °C
Medium	liquid and gaseous
Medium temperature	-15 °C to +80 °C
Long-term stability	Approximately 15 years, significantly longer under laboratory conditions

Certifications / Standards	
Protection class	III (according to EN 60 730)
Protection type	IP 65 according to EN 60 529
Standards	CE conformity, according to EMC Directive 2014/ 30/ EU

Delivery and Packing	
Delivery	Transmitter, Operating instructions, Mounting bracket
Packing	individually packed in cardboard box

Your order code	P - Pressure range			
Article number	Pressure range	code	Pressure range	Max. pressure
801514 2033	P_____	P0001	0 bar bis 0,1 bar	0,6 bar
		P0005	0 bar bis 0,5 bar	3 bar
		P0010	0 bar bis 1 bar	5 bar
		P0025	0 bar bis 2,5 bar	12 bar
		P0040	0 bar bis 4 bar	12 bar
		P0060	0 bar bis 6 bar	12 bar
		P0100	0 bar bis 10 bar	20 bar

Mounting bracket (included in delivery)	
Article image	Technical drawing
Material	Stainless steel
Dimensions (L/W/H)	40 / 20 / 30
Mounting	3 x 4,2 mm drill holes

MW / KC 22.07.2025

Testo Sensor GmbH

+49 7653 96597-71

Managing Director: Peter Kräuter, Timo Löffler

Testo-Straße 1

webshop@testo-sensor.de

Amtsgericht Freiburg HRB 706025 | Umsatzsteuer-ID.: DE274417683

D-79853 Lenzkirch

Please find our whole temperature probe and transmitter portfolio in our webshop at: www.testo-sensor.shop

Technical drawing	Top view
Bottom view	
Important assembly instructions	
<p>Installation is carried out using the supplied bracket in any mounting position. The compact housing allows easy integration into a wide range of applications. Before commissioning, check the pressure and electrical connections for leaks and correct connection.</p>	

Circuit diagrams and assignment (Please also read the operating instructions before connecting the transmitter)	
Circuit diagram	Assignment
	<p>2 = Output pressure 0-10 V</p> <p>3 = GND</p> <p>1 = Supply voltage UB + 24 V AC/ 18 - 33 V DC</p>

MW / KC 22.07.2025

Testo Sensor GmbH

+49 7653 96597-71

Testo-Straße 1

D-79853 Lenzkirch

webshop@testo-sensor.de

Please find our whole temperature probe and transmitter portfolio in our webshop at: www.testo-sensor.shop

Managing Director: Peter Kräuter, Timo Löffler

Amtsgericht Freiburg HRB 706025 | Umsatzsteuer-ID.: DE274417683