

Standard panel type K - vertical gn


Article no.: 809630 22XX

Standard panel type K - vertical gn is made of Glass fiber filled plastic. Perm. range °C up to max. 220 °C. Suitable for Typ K, NiCr-Ni (grün nach DIN EN 60584), Kontaktmaterial: Plus = NiCr - Minus = Ni.

Technical details		Technical drawing
Suitable for	Typ K, NiCr-Ni (grün nach DIN EN 60584), Kontaktmaterial: Plus = NiCr - Minus = Ni	<p>Exemplarisch für sechs Messkreise. Example for six measuring circuits.</p>
Perm. range °C	max. 220 °C	
Housing	Glass fiber filled plastic	
Conductor diameter	Clamps up to 1,6 mm Ø, fast connection by means of shear clamps	
Reverse polarity protection	due to different contact pin widths	
Bushing	spring loaded, original thermocouple materials	
Front plate	Aluminum anodized, corrosion protected	
Measuring circuit numbering	Abrasion and smudge resistant, consecutively numbered	
Panel mounting	with 4 mounting holes for M4 screws	
Scope of delivery	Standard panel type K - vertical gn, packed in PE bag	

Your order code		Configuration				
Code		Number of measuring circuits	Panel length (mm)	Panel height (mm)	Panel cut-out length (mm)	Panel cut-out height (mm)
809630 22__	02	2	72	116	50	40
	06	6	72	116	112	40

Overview of size ratios for different measuring circuits

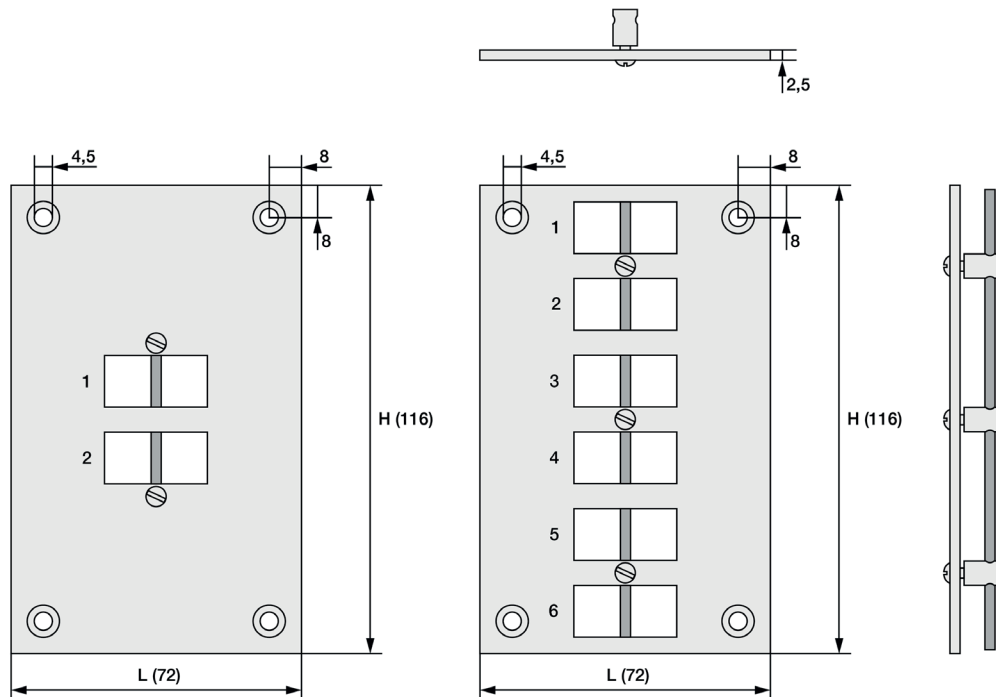

CK / MWA / 11.04.2024

Testo Sensor GmbH

+49 7653 96597-71
 Testo-Straße 1
 D-79853 Lenzkirch
 webshop@testo-sensor.de

Managing Director: Prof. Burkart Knospe, Martin Arndt, Timo Löffler
 Amtsgericht Freiburg HRB 706025 | Umsatzsteuer-ID.: DE274417683

Please find our whole temperature probe and transmitter portfolio in our webshop at: www.testo-sensor.shop