

# Standard panel type K - horizontal gn


Article no.: 809630 12XX

Standard panel type K - horizontal gn is made of Glass fiber filled plastic. Perm. range °C up to max. 220 °C. Suitable for Typ K, NiCr-Ni (grün nach DIN EN 60584), Kontaktmaterial: Plus = NiCr - Minus = Ni.

Technical details		Technical drawing
Suitable for	Typ K, NiCr-Ni (grün nach DIN EN 60584), Kontaktmaterial: Plus = NiCr - Minus = Ni	
Perm. range °C	max. 220 °C	
Housing	Glass fiber filled plastic	
Conductor diameter	Clamps up to 1,6 mm Ø, fast connection by means of shear clamps	
Reverse polarity protection	due to different contact pin widths	
Bushing	spring loaded, original thermocouple materials	
Front plate	Aluminum anodized, corrosion protected	
Measuring circuit numbering	Abrasion and smudge resistant, consecutively numbered	
Panel mounting	with 4 mounting holes for M4 screws	
Scope of delivery	Standard panel type K - horizontal gn, packed in PE bag	

Your order code	Configuration					
Code	Number of measuring circuits	Panel length (mm)	Panel height (mm)	Panel cut-out length (mm)	Panel cut-out height (mm)	
809630 12__	02	2	70	67	40	40
	06	6	146	67	116	40
	12	12	260	67	230	40

**Overview of size ratios for different measuring circuits**

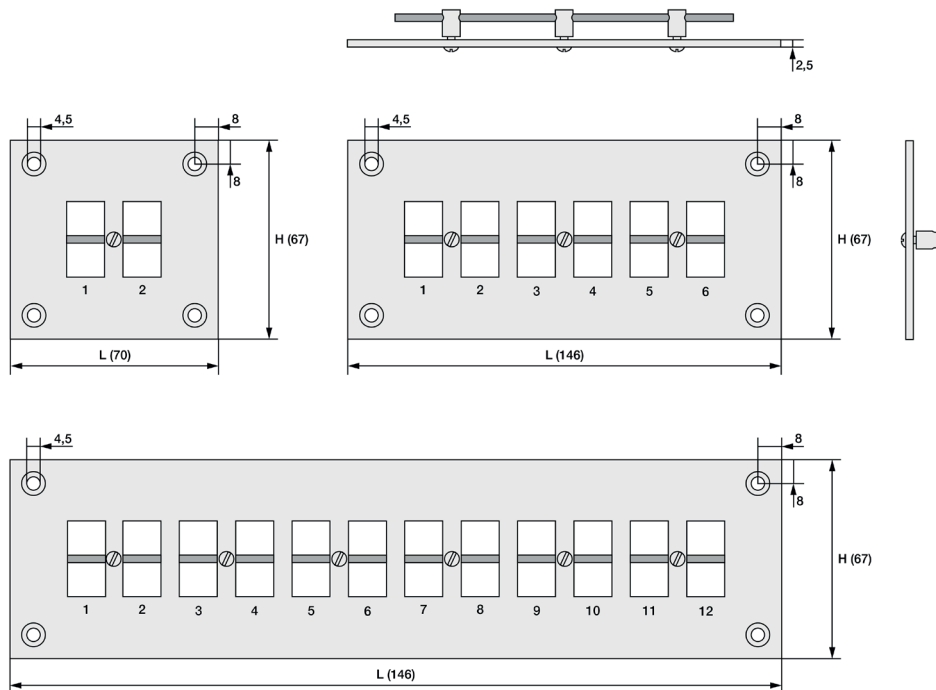

CK / MWA / 11.04.2024

**Testo Sensor GmbH**

+49 7653 96597-71

Testo-Straße 1  
D-79853 Lenzkirch

webshop@testo-sensor.de

Please find our whole temperature probe and transmitter portfolio in our webshop at: [www.testo-sensor.shop](http://www.testo-sensor.shop)

Managing Director: Prof. Burkart Knospe, Martin Arndt, Timo Löffler

Amtsgericht Freiburg HRB 706025 | Umsatzsteuer-ID.: DE274417683